UV-C LED Water Disinfection Module

——MP-UVC-2LP



Key Features

- **Safe: Mercury-Free UV-C LED Technology**-Environmentally friendly, non-toxic, and compliant with global regulations.
- **Effective:** Achieves up to **99.999% (*) Pathogen Reduction** (5.0 log) against bacteria, viruses, and microbes.
- **Efficient:** Up to **90% energy savings** with low power operation, reducing costs.

Product Overview

- Designed for disinfection, the MP-UVC- 2LP uses **mercury-free UV-C LEDs** (270-280 nm) to deliver **up to 99.999% (*) pathogen reduction**, ensuring safe, clean water. Every module undergoes **100% efficacy and water tight testing**, ensuring quality and durability.

Effective Disinfection | Low Maintenance | 100% Efficacy Test | Intelligent | Easy to Install | Eco-Friendly & Energy-Efficient


Water Dispenser


Bathroom Fixtures


Dishwasher


Dental Chair Unit


Ultrapure Water Systems


Motorhome / Yacht

100% Disinfection Efficacy Test

Industry Exclusive! 100% single-tube testing for all UV disinfection modules. Each comes with a unique serial-numbered test report.



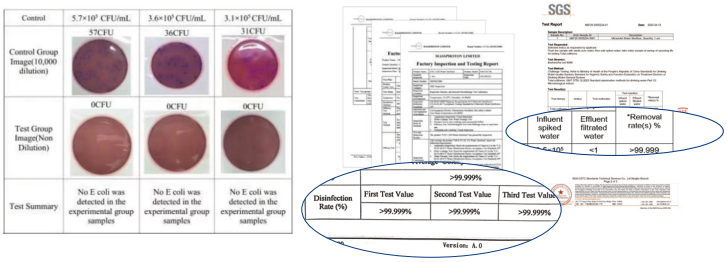

PRODUCT PARAMETERS

PARAMETER	LEVEL
Model	MP-UVC-2LP
MASSPHOTON Standard Configuration (60 mJ/cm² at 95% UVT)	2 lpm 0.53 gpm 0.12 m³/hr
Power Adapter Input	DC 24 V
Total Power	4.5 W
UV-C LED Wavelength	270 nm- 280 nm
UV-LED Lifetime	L70>15,000 h
Sterilization Efficiency	Up to 99.999% or 5.0 Log Reduction (*)
Flow Switch	None
Water Pipe Interface Specification	OD 8.5mm Barb connector
Inlet/Outlet Material	Food-Grade Plastic
Maximum Inlet Pressue	0.2 MPa (30 psi)
Operating Temperature Range	4℃ to 60℃ (39.2℉ to 140℉)
Product Dimensions	18mm×43mm×121mm (0.7in × 1.7in × 4.8in)
Exterior Material	Food-Grade Plastic

(*) The actual disinfection efficiency subjects to the water quality.

The above test results are based on the following test conditions with test strain of Escherichia coli (8099), with 5×10^4 to 5×10^5 CFU/mL dechlorinated sterile test water.

pH	UV transmittance	Turbidity	Temperature	TDS
7.5+0.5	98+2%	< 1.0 NTU	20+2.5°C(68±5 °F)	200 to 500 mg / L

MASSPHOTON LIMITED
Semiconductor Ultraviolet Technology and Applications Expert
www.massphoton.com
info@massphoton.com
Unit 542, 5/F, Building 5W, Hong Kong Science Park